
Yokogawa Electric FA-M3R Supported Cable Pin Assignment (Mark Tube Printing) Figure

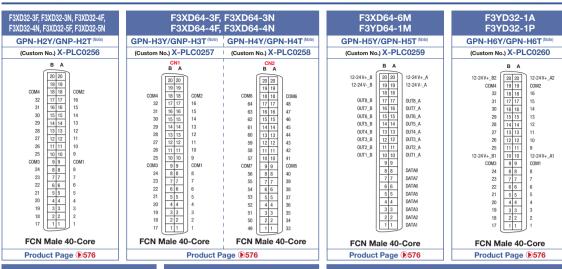

Selection Method of Connector Included Cable Square Connector Included Cable

Included Cable

Round Connector Included Cable Nylon Connector

Included Cable Custom Service

Connector Included Cable

F3	YD32	-1T				
GPN-H8Y/GPN-H8T (Note)						
(Custom No.) X-PLC0262						
в А						
SV, IS2 COMA COMA 32 32 32 30 30 29 30 29 28 29 26 26 26 25 30 30 24 24 22 22 21 20 19 31 8 18 18	20 20 19 19 18 18 18 17 17 16 16 15 15 14 14 11 10 10 10 10 10	59/,A2 COM/2 16 15 14 13 12 11 10 9 5V_A1 COM/1 8 7 6 5 4 3 2				
17	11	1				
FCN Male 40-Core						
Product Page ▶576						
	GPN-HE (Custom SV_B2 COM4 \$2 31 30 29 29 27 26 5 5V_B1 COM3 24 21 20 19 18 17 FCN I	(Custom No.) X-F B A SV_BZ 20 20 COM4 19) 19 19 32 18 18 31 17 17 33 16 16 29 15 15 26 14 14 27 13 13 26 12 21 2 511 11 SV_B1 10 10 COM3 9 9 24 8 8 23 7 7 22 6 6 21 5 5 20 4 4 19 33 18 2 2 17 FCN Male 44				

F3YD64-1A, F3YD64-1F, F3YD64-1P						
GPN-H9Y/GP	N-H9T (Note)	GPN-H10	Y/GPN	N-H10T (Note)		
(Custom No.) X-	(Custom No.) X-PLC0263		(Custom No.) X-PLC0264			
CN1 B A		l I	CN2 B A			
+24 V, B2	+24 V, A2 COM2 16 15 14 13 12 11 10 9 +24 V, A1 COM1 8 7 6 5 4 3 2 1	+24V,82 (COM8) +24V,82 (COM8) 63 (COM8) 63 (COM8) 64 (COM8) 65 (COM8	20 20 19 19 19 18 18 17 17 16 16 15 15 14 14 13 13 12 12 11 11 10 10 9 9 8 8 7 7 7 6 6 5 5 5 4 4 4 3 3 2 2 2 1 1	+24 V, A2 COM6 48 47 46 45 444 43 41 +24 V, A1 COM5 40 39 38 37 36 35 35 34 33		
Product Page ●576						

F3NC01-0N

F3NC11-0N GPN-H15Y/GPN-H15T (Note) (Custom No.) X-PLC0269 ВΔ

> > *Since the signal name of this item is complex, the mark tube is printed with connector pin numbers.

F3WD64-3N					
GPN-H11	Y/GPN	I-H11T (Note)	GPN-H12	2Y/GPI	N-H12T (Note)
(Custom No.) X-PLC0265		(Custom No.) X-PLC0266			
	CN1 B A		l	CN2 B A	
COM4 32 31 30 29 28 27 26 25 COM3 24 23	20 20 19 19 18 18 18 17 17 16 16 16 15 15 14 14 14 13 13 13 12 12 11 11 10 10 9 9 8 8 8 7 7 7 6 6 6	COM2 16 15 14 13 12 11 10 9 COM1 8 7	24V_B2 COM4 64 63 63 62 61 60 59 58 57 24V_B1 COM3 56 55	20 20 19 19 18 18 17 17 16 16 15 15 14 14 13 13 12 12 11 11 10 10 9 9 8 8 7 7 6 6	24V_A2 COM2 48 47 46 45 44 43 42 41 COM1 40 39 38
21 20 19 18 17	5 5 4 4 3 3 2 2	5 4 3 2	53 52 51 50 49	5 5 4 4 3 3 2 2	37 36 35 34 33
FCN Male 40-Core FCN Male 40-Core Product Page ® 576					

F3YD32-1B

GPN-H7Y/GPN-H7T (Not

(Custom No.) X-PLC0261 20 20

16 16 15 15

FCN Male 40-Core Product Page **§**576

12

COM1

COM4 19 19 18 18 17 17 COM2

31

COM3

24 23

GPN-H13Y/GPN-H13T (Note) GPN-H14Y/GPN-H14T (Note			N-H14T (Note)	П			
(Custom No.) X-PLC0267		(Custom No.) X-PLC0268					
CN1		1	CN2				
	ВА		I .	B A		ш	
	20 20	1	12V B2	20 20	12V A2	ш	
	19 19		COM4	19 19	COM2	ш	
COM4	18 18	COM2	64	18 18	48	ш	
32	17 17	16	63	17 17	47	ш	
31	16 16	15	62	16 16	46	ш	
30	15 15	14	61	15 15	45	ш	
29	14 14	13	60	14 14	44	ш	
28	13 13	12	59	13 13	43	ш	
27	12 12	11	58	12 12	42	ш	
26	11 11	10	57	11 11	41	ш	
25	10 10	9	12V_B1	10 10	12V_A1	ш	
COM3	9 9	COM1	I COM3	9 9	COM1	ш	
24	8 8	8	1 56	8 8	40	ш	
23	7 7	7	I 55	7 7	39	ш	
22	6 6	6	54	6 6	38	ш	
21	5 5	5	53	5 5	37	ш	
20	4 4	4	52	4 4	36	ш	
19	3 3	3	51	3 3	35	ш	
18	2 2	2	50	2 2	34	ш	
17	11	1	49		33	П	
FCN Male 40-Core			FCN	Male 4	0-Core		
Product Page ▶576							

F3WD64-4F

F3WD64-4N

FCN Male 40-Core Product Page **§**576

Pins with no signal name are not connected. Cables are selected according to the number of required pins.

Model numbers marked with "(Note)" are those of similar products sold in China. Please note that they are not sold in Japan.

^{*} When ordering, put the custom No. at the end of the model number. (See the product page for the model number)

^{*}Be sure to confirm the signal name upon placing an order as it may slightly differ from the PLC manufacturer manual, in order to distinguish identical signal names.