
Anchors for Aluminum Extrusions

Caster Kits for Doors / Assembly Fixtures / Drilling Jigs / Repair Pen




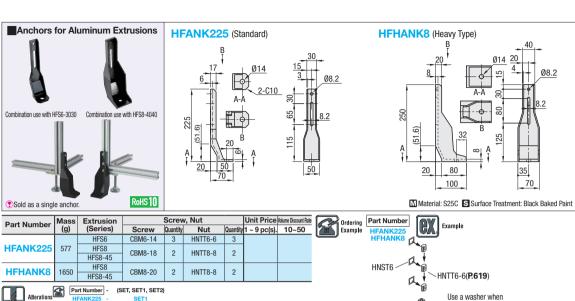

Alteration	Code	Spec.	Extrusion (Series)			
Set of	SET	Set of screws and nuts to mount	HFS8 HFS8-45			
applicable Screws and	SEIT	an anchor to an aluminum extrusion. Anchor bolts are not				
Nuts	SET2	included.	HFS8 HFS8-45			

*When SET1 is selected, three washers (WSSM12-6-1) are included.


©When specifying -SET, -SET1 and -SET 2, the product is not RoHS compliant.

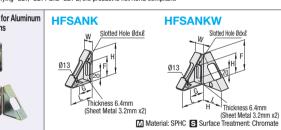

Part Number		Mass	Extrusion	Screw, Nut				ш	-	_	\A/		-	0	Unit Price	Volume Discount Rate
Туре	No.	(g)	(Series)	Screw	Quantity	Nut	Quantity	-	<u>'</u>	G	**	-	u	*	1 ~ 9 pc(s).	10~100
HFSANK	6	318	HFS6	CBM6-15	2	HNTT6-6	1	100	60	40	30	86.5	7	40		
HESANK	8	512	HFS8*	CBM8-15]	HNTT8-8	7 -	120	80	50	40	96.5	10	60	1	
HFSANKW	6	624	HFS6	CBM6-15	4	HNTT6-6	1	100	60	40	33.2	86.5	7	40		
HESANKW	8	1020	HFS8*	CBM8-15	7 4	HNTT8-8	7 4	120	80	50	43.2	96.5	10	60		

* Not applicable to HFS8-45.

Screws and nuts are not included.

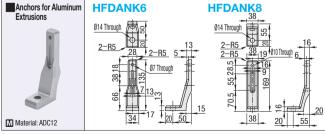

									_			
Part Numb		er	Mass	Extrusion		Screv	v, Nut	ι	Jnit	Price	Volume Discount R	
	Type	No.	(g)	(Series)	Screw	Quantity	Nut	Quantity	1	۽ ~	pc(s).	10~100
	HFDANK	6	118	HFS6	CBM6-20	2	HNTT6-6	2	Γ			
ľ	HEDANK	8	147	HFS8	CBM8-25	٥	HNTT8-8	٥	Г			


* Not applicable to HFS8-45.



and secure the anchor on to the aluminum extrusion




Anchor Bolt




CBM6-14 (P.751)

HFANK225 olts using a hammer. (2) Tighten the nuts of anchor bolts with a

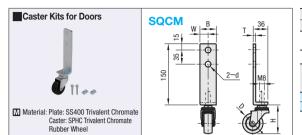


Par	t Nun	ber	Evte	usion		aster wable	1	Mass	Unit Pr	ice Volume Di	Volume Discount Rate								
Ту	ре	No.	EXIII	ision		ad N		(g)	1 ~ 9 pc	(s). 10	10~20								
SQCM		6	30 S	quare		350		160											
		8	40 Square] '	330		100											
							For orders larger than indicated quantity, please check with WOS. Component												
No.									Extrusion Mounting										
No.		Pla	ate		Dedic	ated C	aster	Ex	trusion	Mounting									
No.	В	Pl:	ate T	d	Dedic		aster Quantity			Mounting Nut	Quantity								
No.	B 30		T 6	d							Quantity								












Main Body, Locating Plate

M Material: SS400
S Surface Treatment: Black Oxide

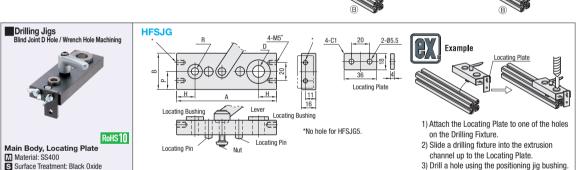

Part Num	ber	Α	В	Р	н	R	D	Extrusion	Component							Unit Price
Туре	Type No.		В		п	n		(Series)	Clamp Lever	Quantity	Nut	Quantity	Screw	Quantity	Locating Plate	Office Price
	5	100	25	10	10	7.3	7.1	HFS5	CLDM5-20-Y		HNTTSN5-5			1	1 no	
HECTO	6	100	30	15	15	8	11.1	HFS6	CLDM6-20-M	4	HNTFSN6-6		CH0B5-8			
HFSJG	8	110	40	20	20	8	13.1	HFS8	CLDM8-25-B		HNTFSN8-8		Споро-о	2	1 pc.	
	8-45	120	45	22.5	22.5	8	15.1	HFS8-45	CLDM8-25-S		HNTFSN8-8					

Applicable Extrusion Series	H mm	H ₁ mm	D Type Hole mm	M Type Hole mm	d (Wrench Hole) mm	D Type Hole (Single Joint)	Wrench Hole (Single Joint)	M Type Hole (Center Joint) (Post-Assembly Fitting Double Joint)	Ordering Example	Part Number HFSJG6
HFS5	10	10	-	7.1	7.3	Wrench Hole	Wrench Hole	M Type Hole		
HFS6	15	15	11.1	11.1		4	Wrellci Hole	•		
HFS8	20	20	13.1	13.1	8	= 1	=			
HFS8-45	22.5	20	15.1	13.1		Single Joint	Tapping Joint	Center Joint		
						glo 00ml	Screw Joint	Center Joint		

Black Anodize Spot Repair Pen ANCPE	Part Number	Volume (ml)	Туре	Features	Color	Usage	Operating Temp. Range (°C)	How to Use / Dry Condition	Main Component	Unit Price 1~9 pc(s).	Volume Discount Rate 10~50
	ANCPE	13	Pen	A felt-tipped pen that can quickly repair flaws on black anodized items. Repairs become less noticeable as the color is similar to that of black anodized aluminum extrusions.	Mat Black	Flaw repairs of black anodized type on aluminum extrusions. Marking on extrusions.	5~35	Shake well before use, and directly apply on the surface to repair.	Assorbia Dania		
(४५४)	Orde Exan	g	Part Num								