

JOINTS FOR COOLING WATER

—PLUGS—




PRINTED IN RED

The quantity discount rate is also applicable to alteration cost.


All price & lead time are to be quoted.

RoHS




LJPJH (Hexagonal head long type)


※Socket connection section

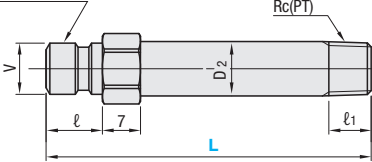

Matching Sockets




M Brass (C3604)
Thread JIS B0203 tapered thread for tubing R(PT)




LJPJ (Hexagonal hole long type)

※Socket connection section

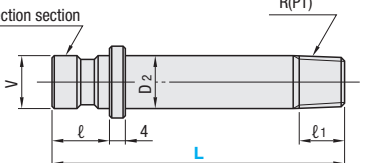

Matching Sockets




M Brass (C3604)
Thread JIS B0203 tapered thread for tubing R(PT)

⚠ Allen wrenching hole on both ends (socket connection and tapered thread parts).
The hex-wrench hole extends to a point mid-way from both ends. It is not fully pierced.


Matching Sockets	Socket connection parts		D1	D2	d	Tapered thread R(PT)	l1	Part Number		L
	V	l						Type	No.	
Cooling Joint Series Socket hole diameter V=9.4	9.4	10.4	12	10	5.8	1/8	9	Hexagonale head, long	1	100 110 120 130 140 150 200
			14	13.2		1/4	11	LJPJH (Brass)	2	
	9.4	10.4	14	10	○5	1/8	9	Hexagonale hole, long	1	
			13.2	13.2		1/4	11	LJPJ (Brass)	2	

* Stock only available for L: 85, 100, 110



JPLJM (L-shaped swivel type - Constant flow type -)


※Socket connection section



Refer to P.1100 on the difference of inner structure of swivel type.

JPLJ (L-shaped swivel type)

※Socket connection section



⚠ Hexagonal hole bored at the tapered screw end.

Matching Sockets

- JPLJM
M Body: Brass (C3604)
Inner parts: Brass (C2700W)
Fluoric rubber
Fluoric rubber grease
- JPLJ
M Brass (C3604)
Thread JIS B0203
Tapered thread for tubing R(PT)

Matching Sockets	Socket connection parts		L	L2	Allen side B	Hexagonal wrench socket phi d	Tapered thread R(PT)	l1	Part Number		U/Price
	V	l							Type	No.	
Cooling Joint Series Socket hole diameter V=9.4	9.4	10.4	35.5	16.5	20	○6	1/8	9.5	L-shaped swivel type	1	Quotation
			38.5				1/4	12.5	JPLJM (Brass)	2	
			39.5				3/8	13.5	JPLJM (Brass)	3	
	9.4	10.4	36.5	15.75	19	○5	1/8	9.5	L-shaped swivel type	1	
			39.5				1/4	12.5	JPLJ (Brass)	2	
			42.5				3/8	13.5	JPLJ (Brass)	3	

⚠ Matching Joint Plug Connections

⚠ Use in atmospheric pressure 980kPa (10kgf/cm²) or lower.

⚠ These plugs are applicable to slim design sockets.

⚠ Guide for Socket • Plug

⚠ Please use JPLJ • JPLJM at water temperature under 120°C.



Order

Part Number — L
LJPJ 2 — 100
JPLJ 1



Delivery

• Printed in Red • Printed in Blue
SGP Stock 3 Days


⚠ For area out of Singapore, please refer to Pi.



Example

• As for L-Shaped Swivel Plugs, the tube extraction angle can be altered by turning its head after tightening the screw.

⚠ Note that intermittent or continuous turning of the head could damage the O-ring, which results in water leakage.



Quantity discount rate

Quantity	1~9	10~100
Rate	—	5%

⚠ To be quoted on price & lead time above Max. Q'ty.

Stocks Availability Subjected to Prior Sales.