




# OIL-FREE SLIDE PLATES

—SINTERED ALLOY BLANK TYPE—



**SPZB**

• Slide direction 

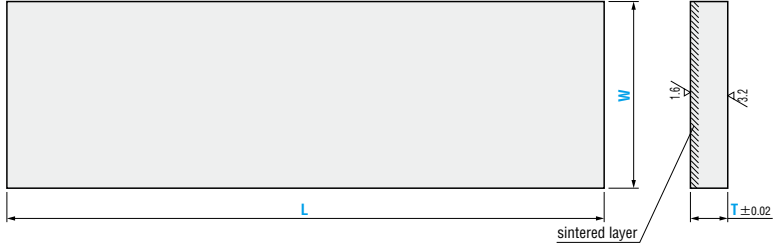

• **When using**

- Please cut it to the desired length with drilling holes before using.
- Please machine the back side when adjusting its thickness.
- Apply grease during the initial break-in before using.

☑ Special sintered alloy  
 //// part is a sintered layer  
 T=10 S45C (Baseplate)  
 T≥20 SS400 (Baseplate)

Catalog No.	W	L	T
SPZB	75	320	10
	100		
	125		
	150		
	75		20
	100		
	125		
	150		
100	320	25	

Order   —  —   
 SPZB 100 — 320 — 10

Days to Ship **Quotation**

Price **Quotation**

■ Recommended bolts

Thickness	Bolt	How to use
5	M6	Flush head bolt
	M8	
10	M8	Low head bolt with R3 treatment at hole part
	M10	
20, 25	M8	
	M10	

